



THE UNIVERSITY *of* EDINBURGH

Edinburgh Research Explorer

Multiple measurement vector based image reconstruction for multifrequency impedance imaging using capacitive sensor

Citation for published version:

Sun, Z, Wang, H, Zhang, M & Yang, Y 2019, 'Multiple measurement vector based image reconstruction for multifrequency impedance imaging using capacitive sensor', Paper presented at 20th International Conference on Biomedical Applications of Electrical Impedance Tomography, London, United Kingdom, 1/07/19 - 3/07/19.

Link:

[Link to publication record in Edinburgh Research Explorer](#)

Document Version:

Peer reviewed version

General rights

Copyright for the publications made accessible via the Edinburgh Research Explorer is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The University of Edinburgh has made every reasonable effort to ensure that Edinburgh Research Explorer content complies with UK legislation. If you believe that the public display of this file breaches copyright please contact openaccess@ed.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



Multiple measurement vector based image reconstruction for multi-frequency impedance imaging using capacitive sensor

Zhijin Sun¹, Haokun Wang¹, Maomao Zhang² and Yunjie Yang¹

¹Agile Tomography Group, University of Edinburgh, UK, y.yang@ed.ac.uk

²Graduate School at Shenzhen, Tsinghua University, China

Abstract: A multiple measurement vector (MMV) model based image reconstruction algorithm is proposed to reconstruct simultaneously conductivity and permittivity distribution based on multi-frequency and complex-valued electrical capacitance tomography (ECT) data. Alternating direction method of multipliers (ADMM) is applied to solve the multi-frequency image reconstruction problem.

1 Introduction

Traditional ECT model and corresponding image reconstruction algorithms can only reconstruct permittivity distribution at a single frequency [1]. Some recent work has demonstrated the concept of complex-valued multi-frequency ECT in simulation, which can, in theory, reconstruct distributions of permittivity and conductivity simultaneously by using non-invasive capacitive sensors [2]. This paper further explores the practical feasibility to perform simultaneous reconstruction of permittivity and conductivity based on experimental data. A MMV model based image reconstruction algorithm is proposed to improve reconstruction quality by utilising spatial and frequency correlations of multi-frequency images.

2 Methods

A complex-valued ECT forward model is firstly established in Eq. (1) to describe the relation of the complex-valued capacitance measurement and the distribution of permittivity and conductivity.

$$\begin{bmatrix} \Delta C_r \\ \Delta C_i \end{bmatrix} = \begin{bmatrix} J_{r,\varepsilon} & J_{r,\sigma} \\ J_{i,\varepsilon} & J_{i,\sigma} \end{bmatrix} \begin{bmatrix} \Delta \varepsilon_r \\ \Delta \varepsilon_i \end{bmatrix} \quad (1)$$

In the above equation, ΔC_r and ΔC_i represent the real and imaginary part of the complex capacitance measurement respectively. $\Delta \varepsilon_r$ and $\Delta \varepsilon_i$ are the real and imaginary part of the complex admittance respectively. J denotes the Jacobian matrix. For simplicity, Eq. (1) can also be expressed by

$$C = JG \quad (2)$$

where $G = \begin{bmatrix} \Delta \varepsilon_r \\ \Delta \varepsilon_i \end{bmatrix} \in \mathbb{R}^{n \times 1}$, $J = \begin{bmatrix} J_{r,\varepsilon} & J_{r,\sigma} \\ J_{i,\varepsilon} & J_{i,\sigma} \end{bmatrix} \in \mathbb{R}^{m \times n}$, and $C = \begin{bmatrix} \Delta C_r \\ \Delta C_i \end{bmatrix} \in \mathbb{R}^{m \times 1}$.

Then MMV based image reconstruction is proposed to encode the structural features and frequency correlations of the images under different frequencies. The resulting optimisation problem is described by

$$\begin{cases} \min_Q \|Q\|_{\omega,2,1} := \sum_{i=1}^n \omega_i \|G^i\|_2 \\ \text{s.t. } JQ = K \end{cases} \quad (3)$$

where $Q = [G_1, G_2, \dots, G_q] \in \mathbb{R}^{n \times q}$ is a collection solutions under q frequencies. $K = [C_1, C_2, \dots, C_q] \in \mathbb{R}^{m \times q}$ is the collection of q multi-frequency measurements. ω is weighting factors.

The ADMM method [3] is applied to solve the image reconstruction problem described by Eq. (3).

3 Results

A single object (non-conductive) imaging experiments were conducted. A typical 8-electrode ECT sensor was used and the background substance is saline of varying conductivity, e.g. $0.2 \text{ S} \cdot \text{m}^{-1}$ and $0.5 \text{ S} \cdot \text{m}^{-1}$. Impedance analyser were used to obtain complex-valued capacitance measurements, which were performed within a frequency range of 2.1MHz to 2.4MHz. The simultaneous image reconstruction results are shown in Figure 1.

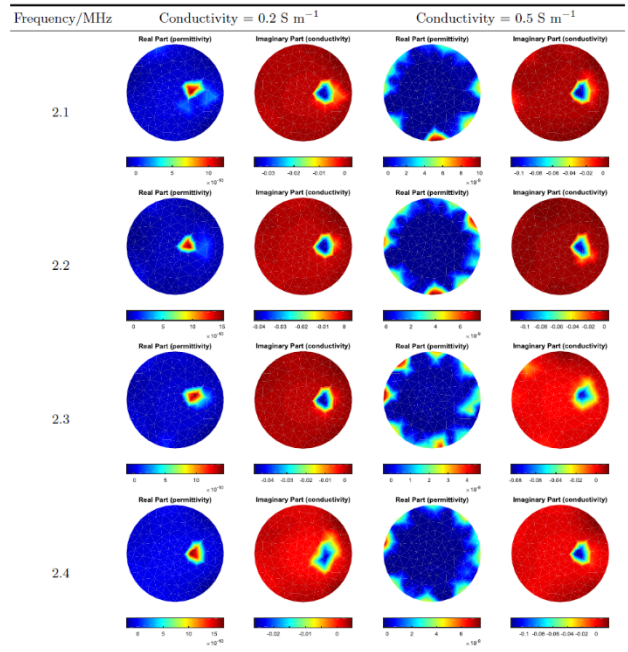


Figure 1: Permittivity and conductivity reconstruction results.

4 Conclusions

The results show that multi-frequency permittivity and conductivity can be reconstructed simultaneously and in high quality based on complex-valued measurement data using ECT sensor and the proposed MMV method. The method is promising for non-invasive biomedical imaging.

References

- [1] W Yang, L Peng *Meas Sci Technol*, **14**(1), p.R1, 2002
- [2] M Zhang, M Soleimani *Meas Sci Technol*, **27**(2):025405, 2016
- [3] Y Yang, J Jia *IEEE Trans Instrum Meas*, **66**(9):2295-305, 2017